


GreenFlex F1 Floor System

SYSTEM TYPE: RETAINED RESILIENT

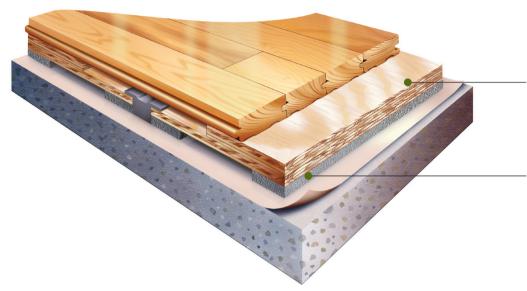

Fabricated Subfloor System retained with polymer retention blocks utilizing recycled granular rubber fulcrum

Action 3/8" (10 mm) continuous performance ribbon pad system

MFMA NORTHERN HARD MAPLE

BY ACTION:

Random Length (RL) Action Long Length (FJ)

TESTING AGENCY:

Certified by ISSS

PERFORMANCE MEETS OR EXCEEDS:

EN 14904 Type 4

DIN 18032 Part 2 (2001)

ASTM F2772 FIBA Level I

SLAB DEPRESSION:

25/32" (20 mm): 2" (50 mm)

33/32" (26 mm): 2-1/4" (57 mm)

LEED:

FSC Maple & Subfloor available, MR credits — based on products, selected materials and facility locations

PERFORMANCE & SYSTEM STABILITY:

- Fixed resilient design for stability
- Excellent athletic playability
- Excellent shock absorption
- Factory fabricated subfloor for superior consistency
- SCORES Compliant

Allied Products, LLC is proud to offer advanced flooring options manufactured by Action Floor Systems, LLC recognized or Certified by the following organizations






























- Environmentally smart system engineered to focus materials where needed for playability and performance.
- Factory fabricated subfloors provide a superior level of uniformity.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040-2006 and ISO 14044: 2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resource Institutes Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.

Complete product specifications and system drawings (CAD and BIM) are available at: www.alliedproducts.com

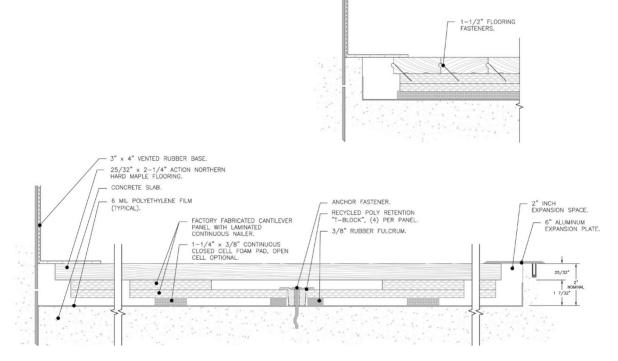

GreenFlex F1

