


## ProAction Flex™ Floor System

**SYSTEM TYPE: FLOATING RESILIENT**

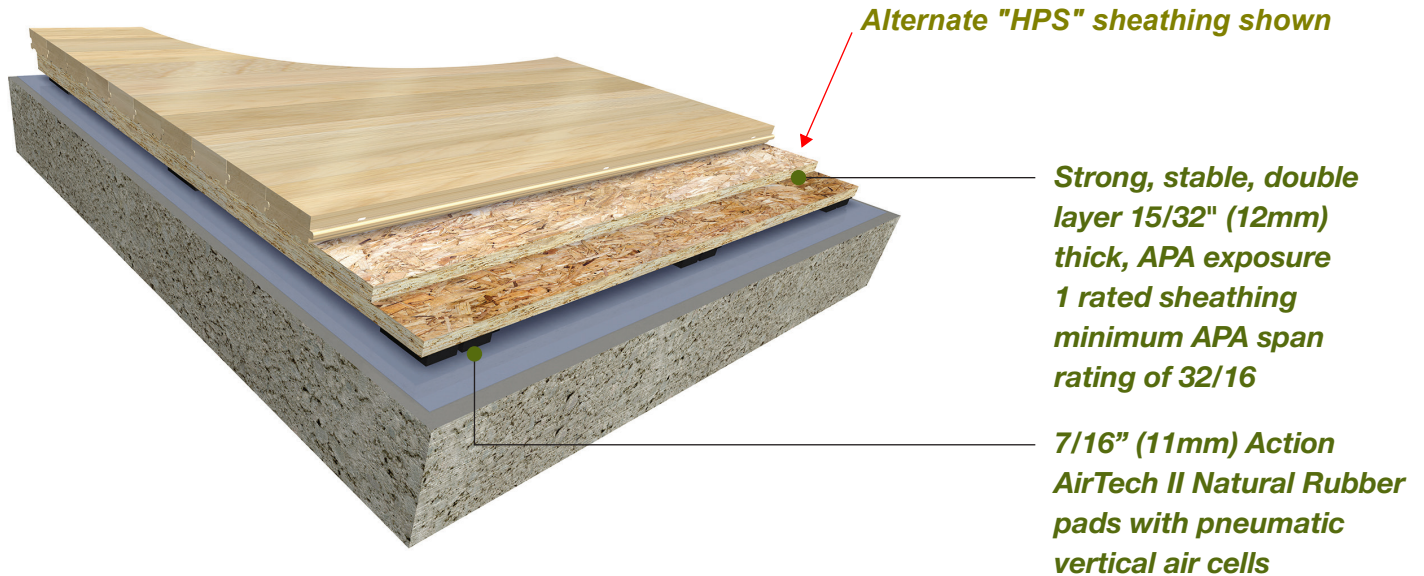

### MFMA NORTHERN HARD MAPLE BY ACTION:

Random Length (RL)  
 Action Long Length (FJ)  
 Expansion Ridge Technology (ERT)

### TESTING AGENCY:

Certified by ISSS

### PERFORMANCE MEETS OR EXCEEDS:

EN 14904

### SLAB DEPRESSION 7/16" (11 mm) PAD:

25/32" (20 mm): 2-1/8" (54 mm)  
 33/32" (26 mm): 3-3/8" (60 mm)

### LEED:

FSC Maple & Subfloor available, MR credits — based on products, selected materials and facility locations

### PERFORMANCE & SYSTEM STABILITY:

- \* Excellent playability, ball bounce and floor uniformity
- \* Consistent playing surface with very good shock absorbtion


- \* Stable double layer APA sheathing subfloor system
- \* AirTech 5/8" (16 mm) and 3/4" (19 mm) pad options available
- \* SCORES Compliant
- \* Performance can be matched to activity needs through pad option
- \* System features a low profile height

Allied Products is proud to offer advanced flooring options manufactured by Action Floor Systems, LLC recognized or certified by the following organizations

- Delivers uniform surface, the floor system can be tuned to meet your performance expectations.
- Features the proven stability and playability of double layer 15/32" (12 mm) sheathing subfloor design.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.

Complete product specifications and system drawings (CAD and BIM) are available online at:

[www.actionfloors.com](http://www.actionfloors.com)

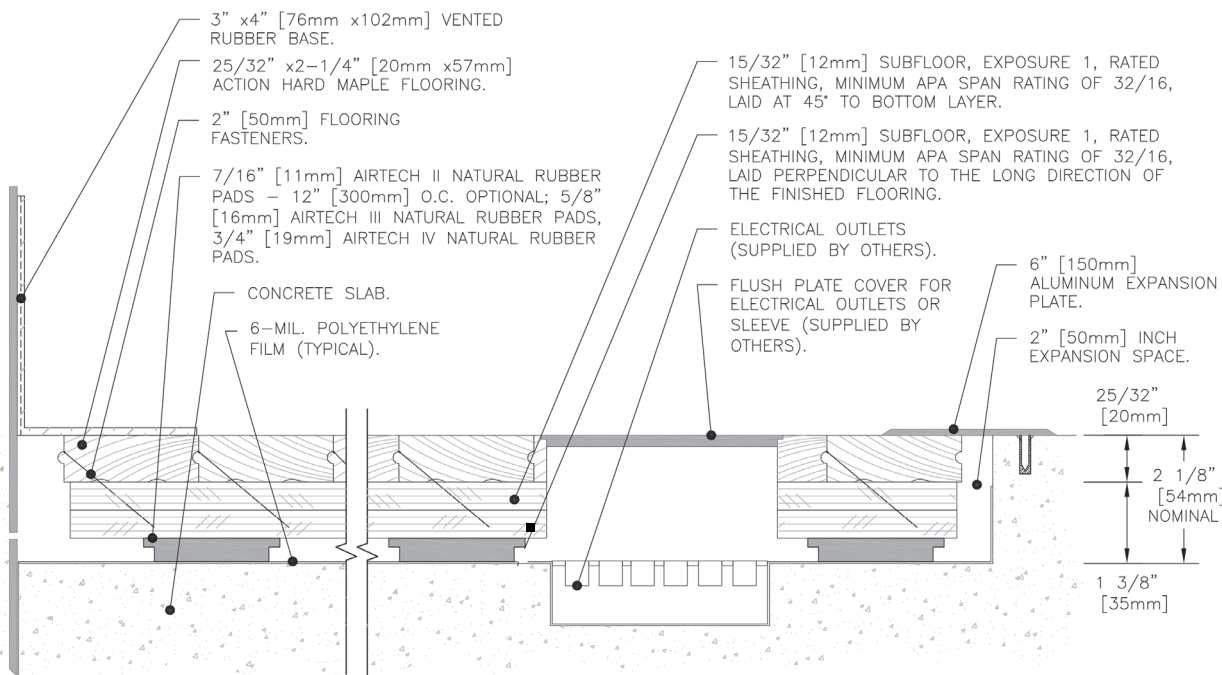

## Action ProAction Flex



Contact Allied Products for full specifications and free quotations

**1-800-864-1272**

[www.alliedproductsllc.com](http://www.alliedproductsllc.com)