


# ActionThrust™ I Floor System

**SYSTEM TYPE: FLOATING RESILIENT**

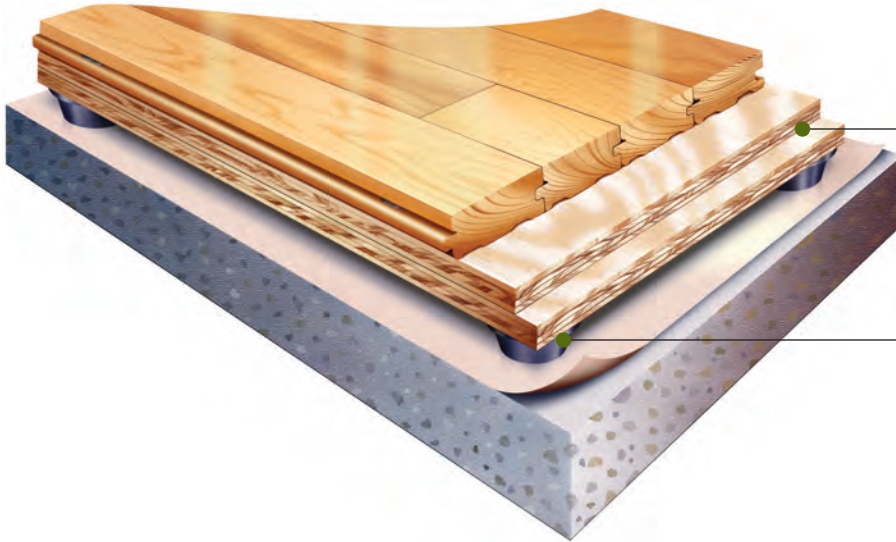

**Two Layers  
15/32" (12 mm)  
Plywood Subfloor  
or "HPS" (Hardwood -  
Premium Sheathing)**

**AirThrust ProFlex or  
AirFlex 3/4" (19 mm)  
Natural Rubber Pads**

**MFMA NORTHERN HARD MAPLE  
BY ACTION:**

Random Length (RL)  
Action Long Length (FJ)

**TESTING AGENCY:**

Certified by ISSS

**PERFORMANCE MEETS OR EXCEEDS:**

**SLAB DEPRESSION:**

25/32" (20 mm): 2-1/2" (64 mm)  
33/32" (26 mm): 2-3/4" (70 mm)

**LEED:**

FSC Maple & Subfloor available, MR credits — based on products, selected materials and facility locations

**PERFORMANCE & SYSTEM STABILITY:**

- Conical natural rubber pads recover quickly after impact
- SCORES Compliant
- Stable double layer plywood subfloor system
- Excellent shock absorption


Allied Products, LLC is proud to offer advanced flooring options manufactured by Action Floor Systems, LLC recognized or certified by the following organizations:



- Delivers excellent shock absorption, the floor system can be tuned to meet your performance expectations.
- Features the proven, stable, durable double layer plywood design.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040-2006 and ISO 14044: 2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resource Institutes Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.

Complete product specifications and system drawings (CAD and BIM) are available online at:

[www.actionfloors.com](http://www.actionfloors.com)

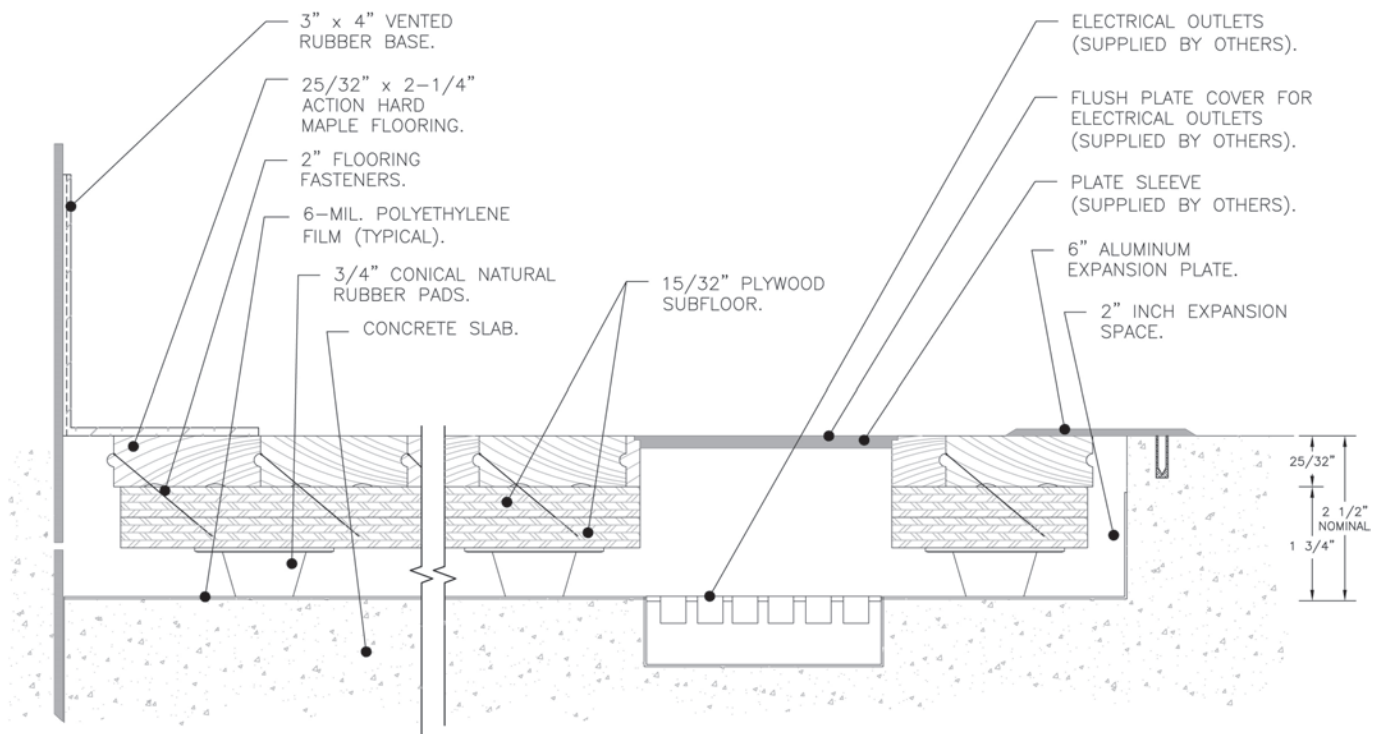

## ActionThrust I